


Test report : CEE-0273/25-1
NB : 1722



Type: B
Fuel: Wood Logs

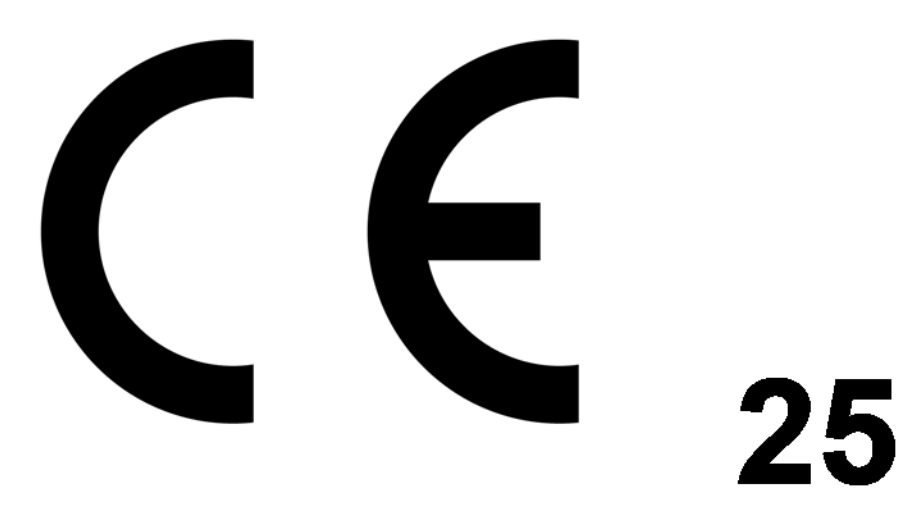

IACO VITRO ECO 90; N° Série 01-03-00---

Solzaima, SA., Rua da Cova da Areia (E.M. 605), 695, 3750-071 Aguada de Cima
Águeda- Portugal - Made in Portugal

N° DOP DD-084-B

Emissions (13%O ₂):			Performance:		
Nom		Part	Nom		Part
CO :	1250 mg/m ³	-	P:	11 kW	-
NOx :	200 mg/m ³	-	P _W :	-	-
OGC :	80 mg/m ³	-	P _{SH} :	11 kW	-
PM :	40 mg/m ³	-	η :	80 %	-
			p :	12 Pa	-

EN 16510-1:2022 / EN 16510-2-2:2022

Flue gas outlet temperature (Nom-Part):	346 °C- -
Diameter of the flue gas outlet :	200 mm
Fire safety of installation to the chimney :	T 400 G
Seasonal space heating efficiency (η _s) :	70 %
Energy Efficiency Index (EEI) :	106
Energy Efficiency Class :	A
The permissible maximum water operation pressure (P _w - bar):	-
Protective Insulation according to manufacture r's instructions :	40 mm
Power supply voltage (E) :	-
Power supply frequency (f) :	-
Maximum electric power input (W _{max}) :	-
Mass of the appliance (m) :	136 kg
Fuel Type :	Type I
Operation Type :	INT - Intermittent

Minimum distances to combustible materials

Bottom d _B = 0 mm	Floor d _F = 1500 mm	Side radiation area d _L = 1500 mm
Ceiling d _C = 1500 mm	Rear d _R = 500 mm	
Front d _P = 1500 mm	Side d _S = 530 mm	
Non-Comb d _{non} = -		